


22GH / 25GH

TANDEM DUAL AXLE GOOSENECK HYDRAULIC DOVETAIL TRAILER

BigTex
TRAILERS


 GVWR: 23,900# - 25,900#  LOAD CAPACITY: 12,990# - 17,350#  AVAILABLE LENGTHS: 32' - 40'  BED WIDTH: 102" WIDE  COUPLER: Gooseneck

 EMPTY WEIGHT: 8,460# - 11,000#  AXLES: TANDEM (2 X 10,000# OR 12,000#)  DECK HEIGHT: 33"

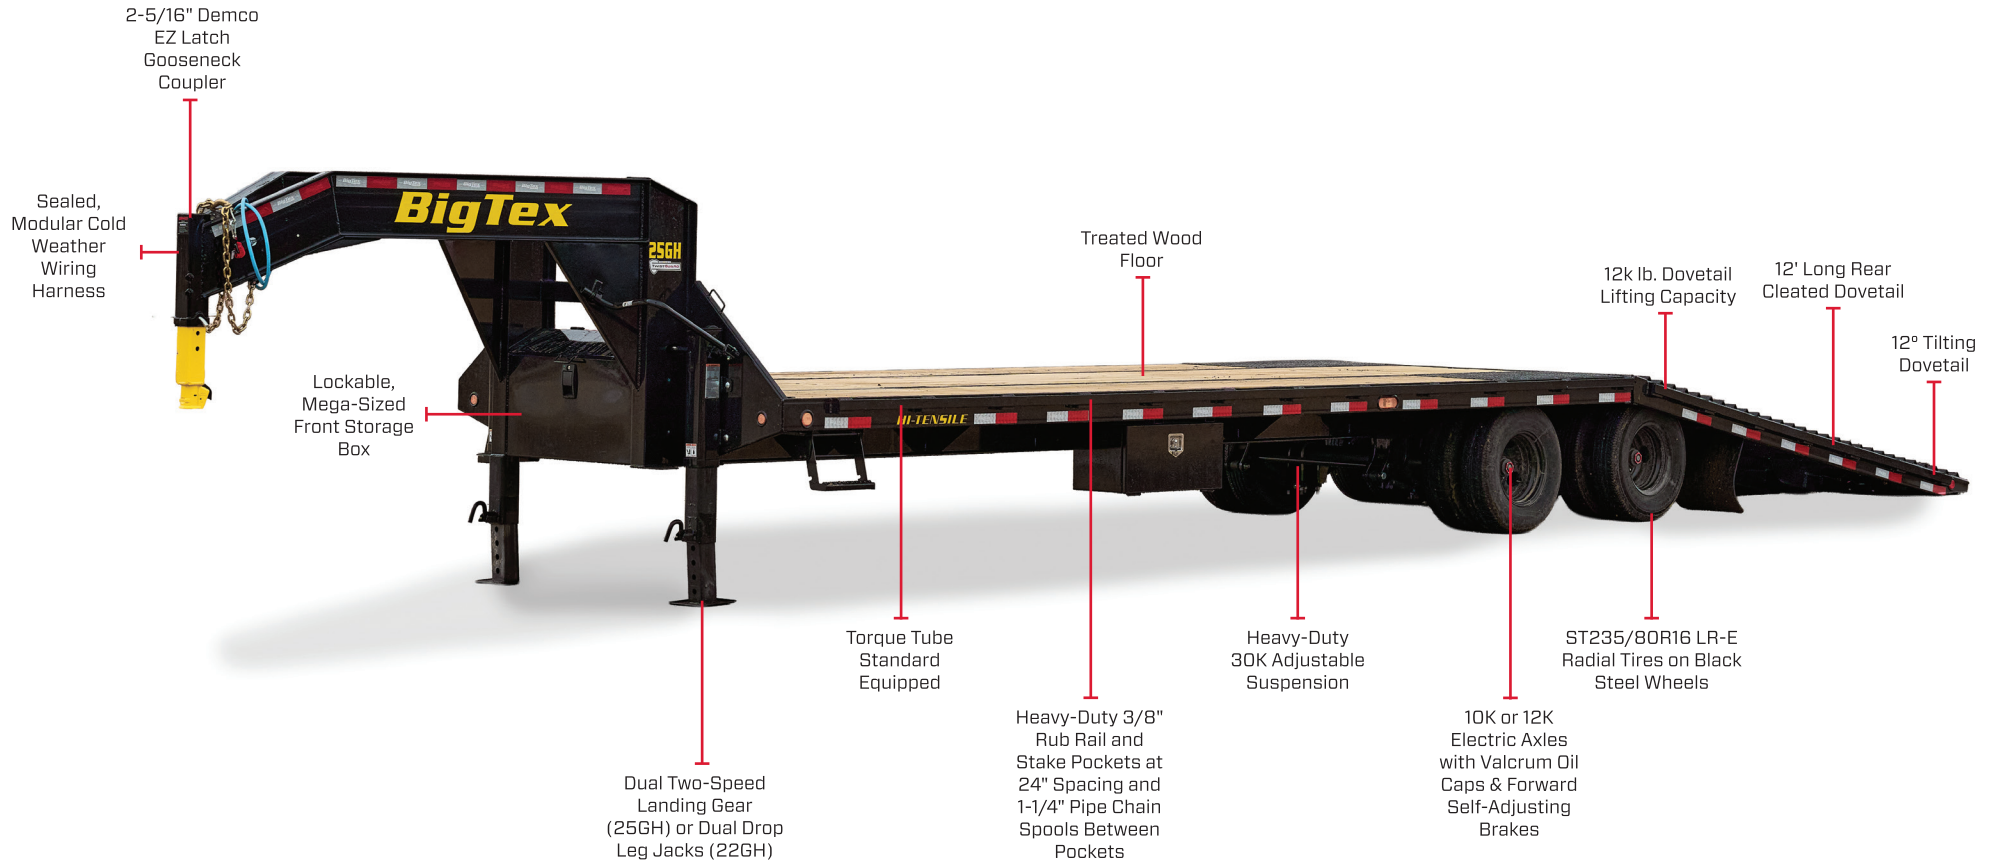

HYDRAULIC DOVETAIL

Provides a 12-degree loading angle with a 12-foot hydraulic dovetail, traction bars, a 12,000-pound lift capacity, and a 10,000-pound haul capacity. Designed to make loading heavy equipment more controlled and stable, while the low-angle approach and traction bars improve tire grip and reduce slippage during loading.

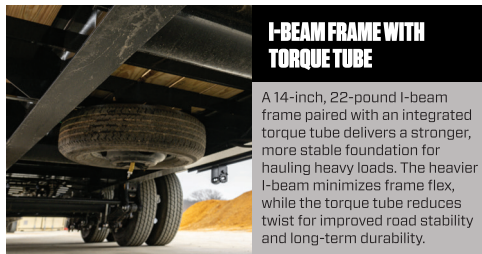

I-BEAM FRAME WITH TORQUE TUBE

A 14-inch, 22-pound I-beam frame paired with an integrated torque tube delivers a stronger, more stable foundation for hauling heavy loads. The heavier I-beam minimizes frame flex, while the torque tube reduces twist for improved road stability and long-term durability.



SLIDING WINCH TRACK

Standard sliding winch track along the deck allows tie-down points to be positioned where they're needed. This gives operators more flexibility to secure a wide range of cargo efficiently without being limited to fixed anchor points.



MEGA-SIZED FRONT LOCKABLE TOOLBOX

Large lockable front storage box provides secure, organized storage for chains, binders, and essential gear. Keeps equipment protected and off the deck to reduce clutter and help prevent lost or damaged items on the job.